

HI BAY REFLECTORS



HI BAY REFLECTORS

FEATURES

- 400W OR 250W METAL HALIDE
- CAST ALUMINIUM GEAR BOX
- 1.5 METRE FLEX AND 3 PIN PLUG
- CLOSED SAFETY HOOK
- IP44 RATED CONTROL GEAR BOX
- REACTOR CONTROL GEAR
- KEY LOCK SYSTEM FOR REFLECTOR
- HI QUALITY ALUMINIUM REFLECTORS

BENEFITS


- EFFICIENT AND ECONOMIC LIGHTING
- EASY TO INSTALL
- SAFETY FEATURES
- FLEXIBILITY IN REFLECTOR CHOICE
- EXCELLENT HEAT DISSIPATION

APPLICATIONS

- WAREHOUSES
- FACTORIES
- SERVICE AREAS
- BULK GOODS STORES
- GYMNASIUMS
- SPORTS FACILITIES
- SELECTED RETAIL OPERATIONS


SPINNER

- 400 WATT SKU 369024
- 250 WATT SKU 369025

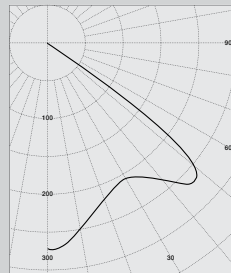


FACETOR

- 400 WATT SKU 369026
- 250 WATT SKU 369027

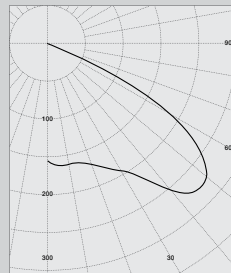


PERCEPTOR

- 400 WATT SKU 369023
- 250 WATT SKU 369022

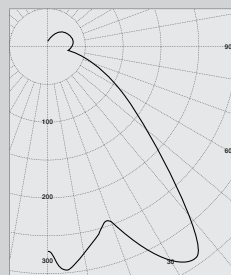

LOW BAY

- 400 WATT SKU 369028
- 250 WATT SKU 369029

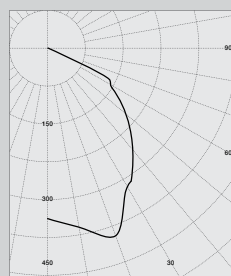

HI BAY SPINNER





SPINNER

The HI BAY SPINNER incorporates a high grade aluminium reflector with the rugged strength of IP44 gear box. The end result is a low glare fitting able to achieve an excellent, even light distribution.

An optional safety glass is also available with quick fit hinges perfect for those areas where a covered fixture is required.


The Spinner is ideal for factories, warehouses, sports facilities and manufacturing applications.

SKU	WATTS	DIAMETER	HEIGHT	CONT / GEAR	LAMPS
369024	400W MH	488mm	545mm	✓	✓
369025	250W MH	488mm	545mm	✓	✓
369006	Glass Diffuser	488mm	5mm	✗	✗

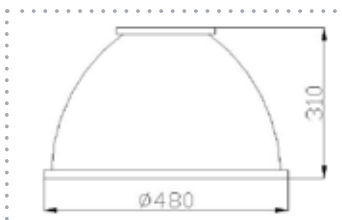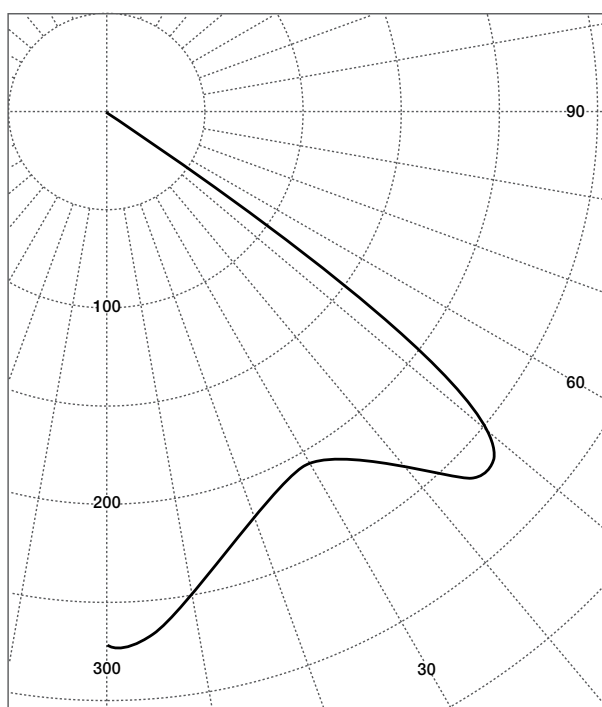

Light Output Ratio = 83.6%
SHR-NOM= 2.00
SHR-MAX= 2.07

- Hinged glass diffuser available
- Photometric data available upon request
- Suspension chain not included



- Above polar curve is for 400 Watt MH
- Photometric data available at www.beaconlightingcommercial.com.au

HI BAY FACETOR





FACETOR

The HI BAY FACETOR incorporates a high grade faceted aluminium reflector with the rugged strength of IP44 gear box. The end result is a low glare fitting with a high spacing to mounting ratio, that is able to achieve an excellent even light distribution.

An optional safety glass is also available with quick fit hinges perfect for those areas where a covered fixture is required.


The Facetor is ideal for factories, sports facilities and warehouse applications.

SKU	WATTS	DIAMETER	HEIGHT	CONT / GEAR	LAMPS
369026	400W MH	485mm	545mm	✓	✓
369027	250W MH	485mm	545mm	✓	✓
369008	Glass Diffuser	485mm	5mm	✗	✗

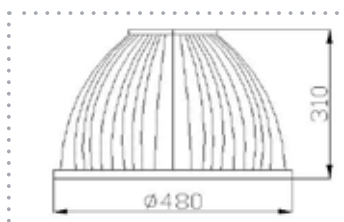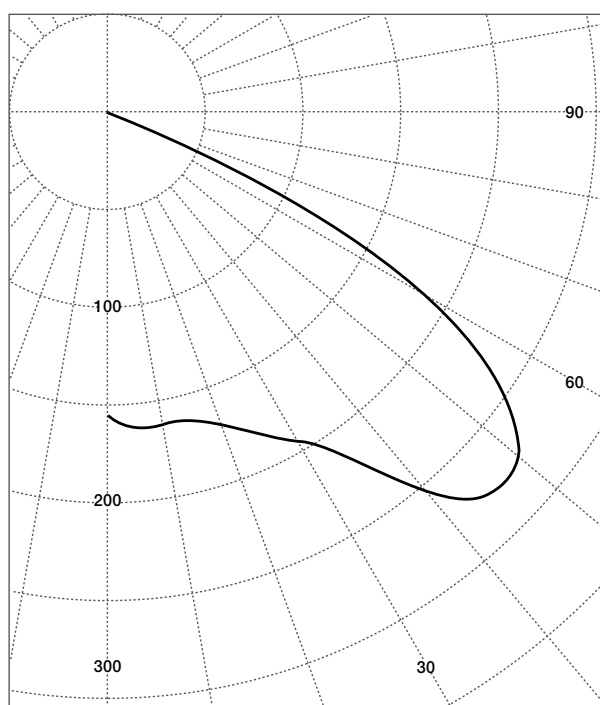

Light Output Ratio = 84.3%
SHR-NOM= 2.00
SHR-MAX= 2.17

- Hinged glass diffuser available
- Photometric data available upon request
- Suspension chain not included



- Above polar curve is for 400 Watt MH
- Photometric data available at www.beaconlightingcommercial.com.au

HI BAY PERCEPTOR






PERCEPTOR

The HI BAY PERCEPTOR incorporates a high grade prismatic enclosed reflector with the rugged strength of IP44 gear box. The end result is a low glare fitting with an upward light component.

The Perceptor is great for those areas where a covered fixture is required and ideal for factories, warehouses, sports facilities and retail applications.

SKU	WATTS	DIAMETER	HEIGHT	CONT / GEAR	LAMPS
369023	400W MH	570mm	690mm	✓	✓
369022	250W MH	570mm	690mm	✓	✓

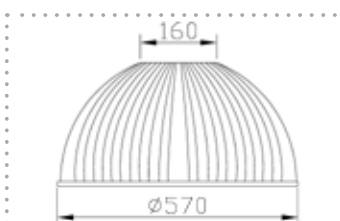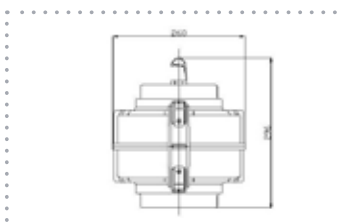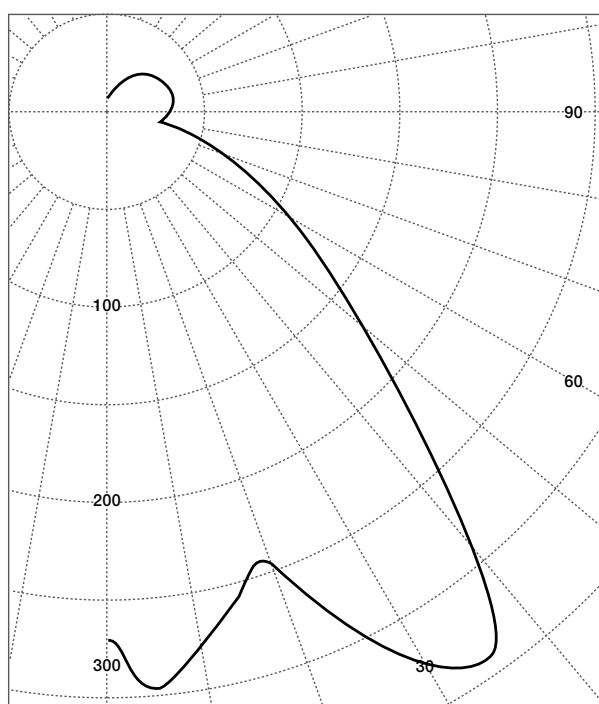

Light Output Ratio = 95.4%
SHR-NOM= 1.25
SHR-MAX= 1.38

- Cover included
- Photometric data available upon request
- Suspension chain not included



- Above polar curve is for 400 Watt MH
- Photometric data available at www.beaconlightingcommercial.com.au

HI BAY LOW BAY






LOW BAY

The HI BAY LOW BAY incorporates a high grade aluminium reflector and hinged diffuser with the rugged strength of IP44 gear box resulting in a high light output and excellent low glare control.

The Low Bay is ideal for factories, warehouses, food manufacturing and retails applications where a low mounted, covered and comfortable lighting environment is required.

SKU	WATTS	DIAMETER	HEIGHT	CONT / GEAR	LAMPS
369028	400W MH	770mm	615mm	✓	✓
369029	250W MH	770mm	615mm	✓	✓

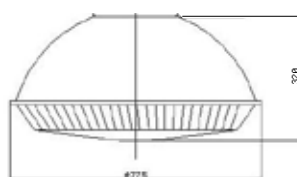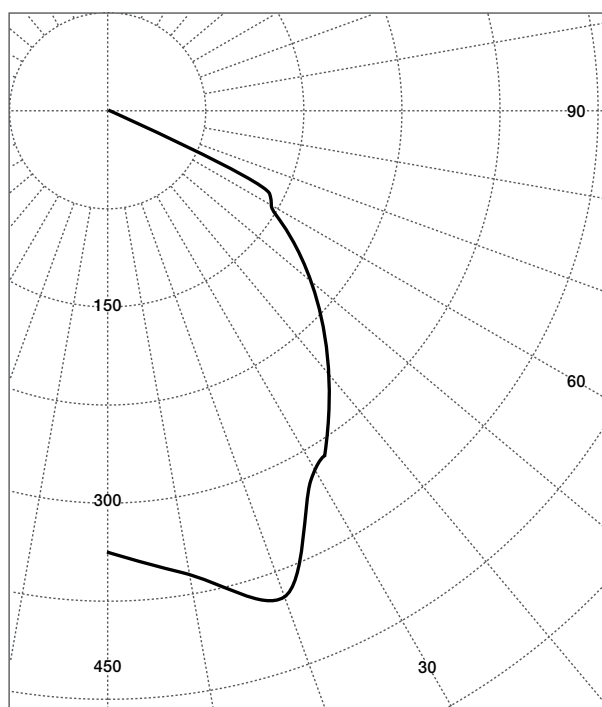

Light Output Ratio = 83.1%
SHR-NOM= 1.25
SHR-MAX= 1.33

- Hinged cover included
- Photometric data available upon request
- Suspension chain not included



- Above polar curve is for 400 Watt MH
- Photometric data available at www.beaconlightingcommercial.com.au